




Multifunctional premium-class compact 2-way system. The coaxial configuration in combination with a carefully designed large-area horn ensures absolutely constant response even off the main axis. High-power Neodym drivers and long-excursion coils provide high efficiency and reduced distortion. Nine M10 threaded mounting points are available to mount MultiRigg hardware and other accessories for installation or mobile applications. The integrated digital amplifier technology provides 800 / 400 Watt AES and DSP control. A range of factory-configured presets and volume settings can be selected.

PRODUCT SPECIFICATIONS

Speaker Components	10" Nd (3" VC) / 1" Nd (1,7" VC)
Description	Multifunctional Coaxial Sound System
Amp Power AES	LF: 800 W / HF: 400 W / 110-230 V
Rated Current	0,5 A
SPL Peak @ 1 m	127 dB
Max. Input Signal	25 dBu
DSP	DPLMx FPGA Processing 32 bit floating point
AD / DA	24 bit / 96 kHz
Latency	0,8 ms (analog in to analog out)
Usable Range	60 Hz - 19 kHz (-6 dB)
Tuning Frequency excursion minimum	70 Hz
X - Overpoint acoustical	Depends on preset
Coverage horizontal / vertical	80° x 60° - rotatable
Connectors	XLR in, Ethercon, Powercon in
Handles	2 x
Rigging / Fittings	9 x M10 To be used with MultiRigg™ 35 mm pole mount
Weight	13,5 kg
Size height x width x depth	45,0 x 31,0 x 29,0 cm
Order No.	01093/dp




DIMENSIONS

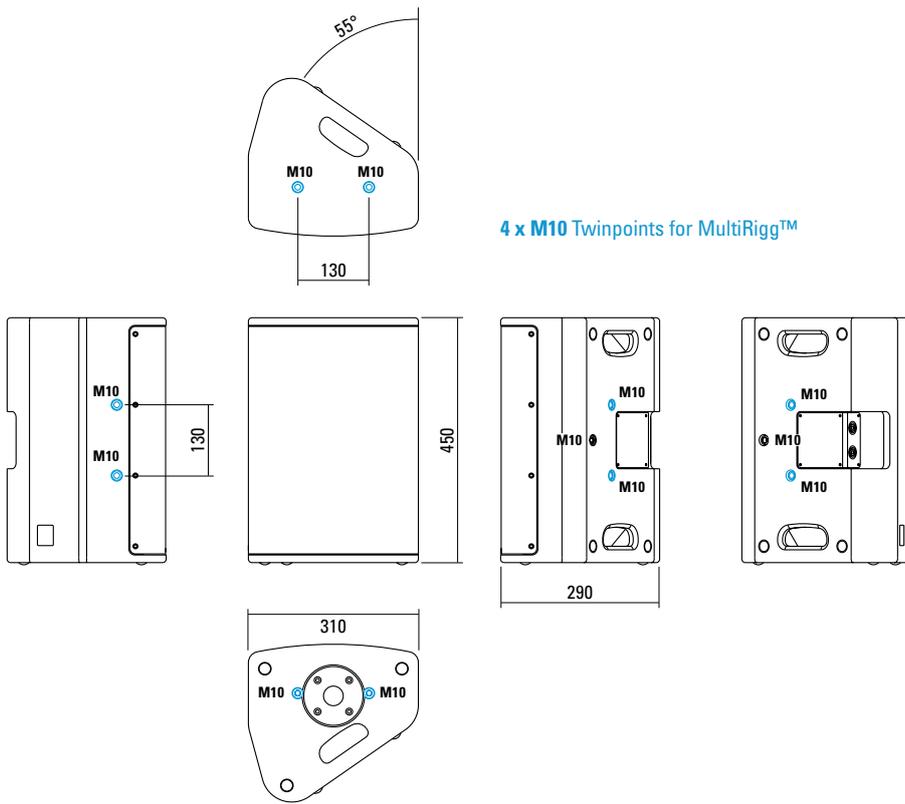


MEASUREMENTS


2D Directivity Plot - horizontal

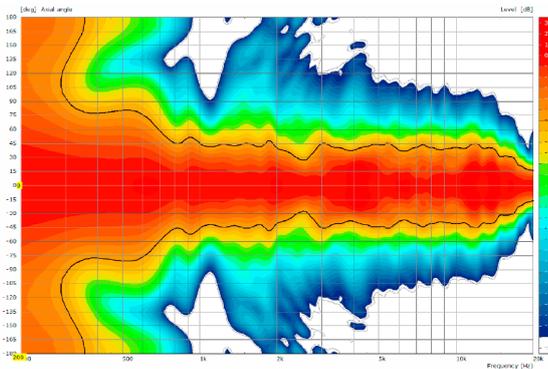


Sensitivity 1 W @ 1 m + Impedance

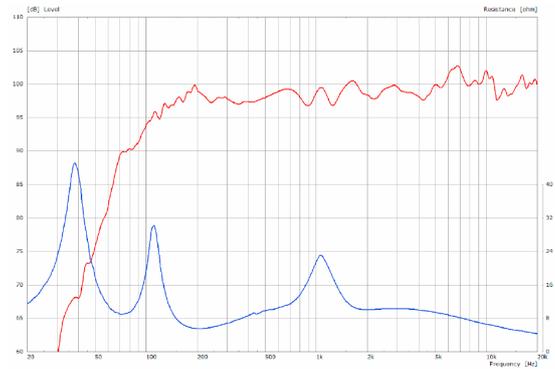

2D Directivity Plot - vertical

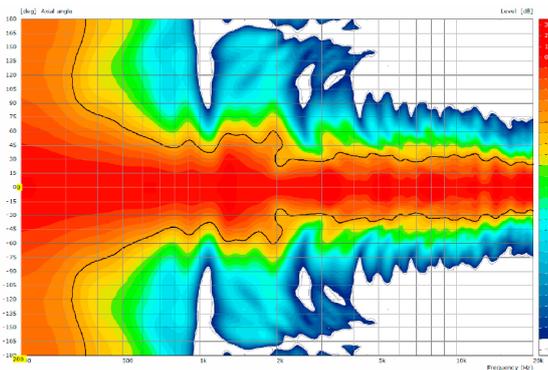

Frequency Response with Presets

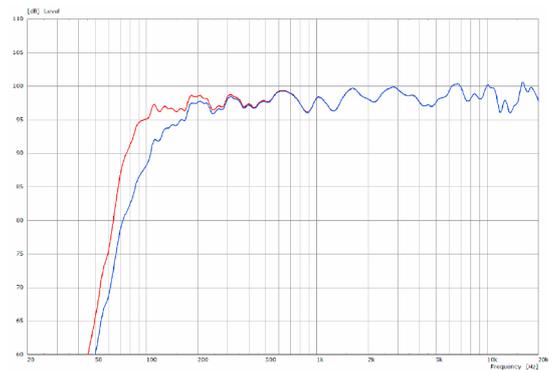

The X 4 dp features integrated digital amplifier electronics with a DSP controller (dp = digitally powered). Various factory-configured presets and volume settings can be called up directly on the box or via a network connection.

High-grade electronic components from the industrial sector and a first-class circuit design ensure excellent audio quality with low distortion and a minimal noise floor. Highly efficient and “intelligent” limiter systems ensure optimum protection against overload, without restricting the possibilities offered by this high-performance sound system.

 [Presets > Click Start Manual](#)


Level
Adjustment in 3 dB steps (-12 dB to +6 dB).

Status
Mute LED
Red light when the system is muted or under technically critical conditions.

Limit LED
Yellow light when the limiter is restricting the level.

Signal LED
Green light when the input signal exceeds -20 dBu

Power LED
Green light when the system is switched on.

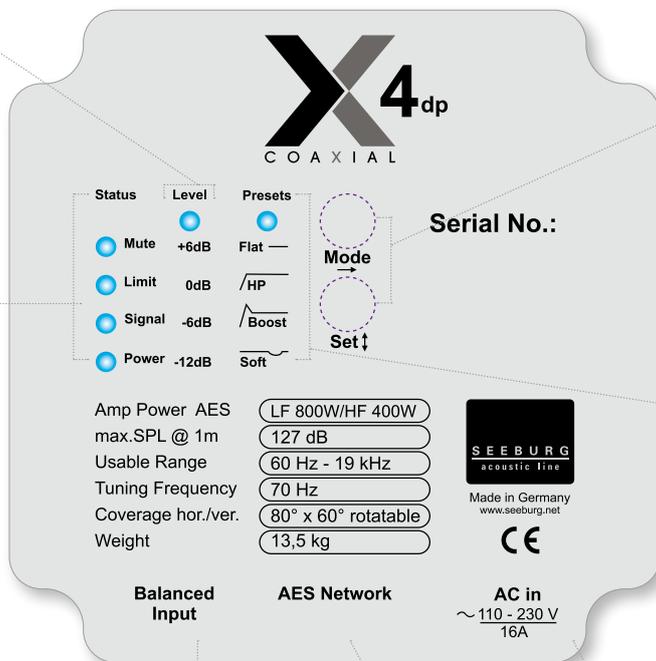

Mode - key
Switches between control modes: Status, Level and Presets.

Set - key
Setting of various values and Mute on / off.

Presets
Flat
This setting provides a linear frequency response with a neutral sound characteristics. Standard setting for many applications.

HP
Switches in a high pass filter for use in combination with a subwoofer.

Boost
The same neutral response as the „Flat“ setting, but with the addition of a bass boost.

Soft
Reduces the level in the frequency range from 2.5 - 5 kHz, to which the ear is particularly sensitive. This setting is recommended for high level reproduction of highly compressed music tracks.


XLR
- Symmetrical analog input.
- Effective filter protection against HF interference and DC Voltages.
- Electronically balanced to prevent noise.

Ethercon
Interface for remote control and audio transfer via ethernet (AES 67).

Powercon (blue)
Power supply
~ 110-230 V / 16 A max.

SEEBURG NETWORK Manager

With the Software SEEBURG Network Manager all selfpowered systems can be controlled via network.

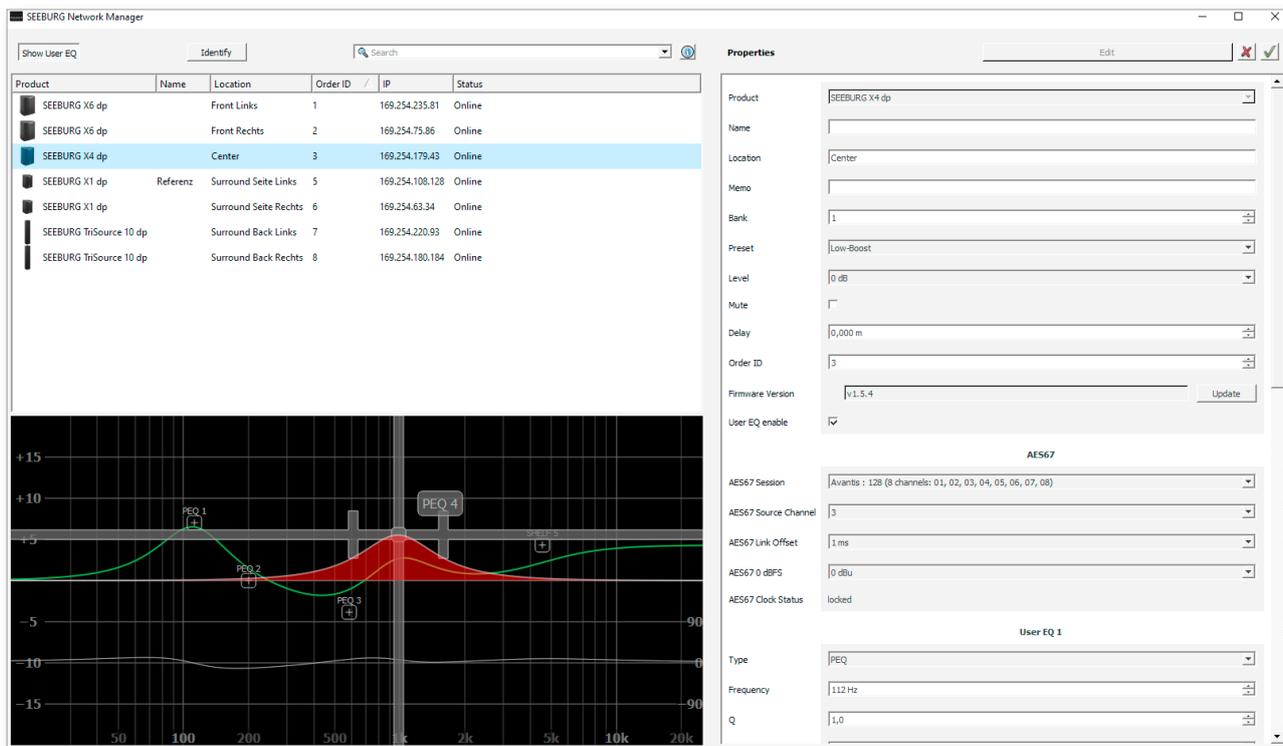

Features:

- > **Remote control** of functions such as recalling presets and banks, level control and mute, and locking the controls on the loudspeakers.
- > **Visual display** of all systems connected to the control network.
- > Storable names and location labels with a **global search function**.
- > **Selection of loudspeakers** in the list for simultaneous set-up and control changes.
- > **Fully parametric user EQs and delay settings** for time alignment, with a graphical user interface
- > **Time Delay** with up to **2.8 seconds runtime**.
- > **Audio-over-Ethernet (AoE) via AES 67**.
- > Connection with **media control systems** via **API**.
- > Basic **network settings**.
- > **Documentation** is available **online**.
- > **Identification function** by way of flashing LEDs on the dp loudspeaker systems.
- > **Firmware updates** can be applied.



 [SEEBURG Network Manager > Quick Start Manual \(pdf\)](#)

AES NETWORK interface

All selfpowered systems are equipped as standard with an **AES Network interface**.

This is used for **remote control** via the **SEEBURG Network Manager** and for **Audio-over-Ethernet (AoE) audio transmission** via **AES 67**.



AES Network

MultiRigg™



swiveling fastening solution for horizontal and vertical alignment, for flown / ground stacked / mounted applications, incl. accessories (2 x knurled screws M10 x 20 mm, 1 x handle screw M8 x 55 mm), max. load 50 kg
Order No. **01360**

MultiRigg™ light



version for fixed installations, for horizontal and vertical alignment, tiltable vertical angle, incl. accessories (2 x M10 x 20 socket head screws), max. load 50 kg
Order No. **01362**

MultiTilt™



Tilt adapter with adjustable tilt from 0° to 37,5° (2,5° steps), integr. pole mount adapter with clamping device, 2 x knurled screws (M10 x 20 mm), max. load 50 kg
Order No. **01370**

Knurled Screw



M10 x 20 mm
Order No. **73750/w** (RAL 9010)
Order No. **73750**

Knurled Head Nut



reduction screw for fastening M10 Pole Mount Adapter (08126)
Order No. **73755**

Pole Mount Adapter



35 mm \varnothing → M10 x 16 mm, M8 x 20 star knob screw
Order No. **08126**
35 mm \varnothing → M10 x 16 mm
Order No. **08126/II**

Steel Safety



6 mm x 600 mm, black, max. load 22 kg (BGI 810-3), quick connector undetachably
Order No. **01376/6**

TV Spigot



10 mm internal thread, 28 mm \varnothing
Order No. **08128**

Ring Screw



M10– DIN 580
Order No. **73700** (zincd)
Order No. **73700/sw** (black zincd)

Quick Trigger Clamp



max. load 100 kg
Order No. **01223/100 kg**

Quick Trigger Clamp - small



M10, max. load 20 kg
Order No. **01223/20 kg**



MultiRigg™light



MultiRigg™



ACCESSORIES X 4 dp

Adapter



for X 4, X 6, X 8
for mounting with Wall Mount (03034),
incl. 2 x M10 x 20 socket head screws

Order No. **01198/w** (RAL 9010)
Order No. **01198**

Wall Mount



2 x M6 fixing holes (d=73 mm),
1 x M10 fixing hole (center),
max. load 25 kg

Order No. **03034/w** (RAL 9010)
Order No. **03034**

Wall Mount



bar: 269 mm, max. load 40 kg,
incl. (M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)

Order No. **08130/F/269/w** (RAL 9010)
Order No. **08130/F/269**

Wall Mount



with tilt unit, max. load 40 kg
Order No. **08130**

Hybrid Cable System



PowerCon-PowerCon / XLR-XLR

2,5 m Order No. **08462**
5 m Order No. **08464**
10 m Order No. **08466**
15 m Order No. **08468**

Cover



for X 4,
padded
Order No. **01225/X4**

Rain Cover



for X 4,
with zipper
Order No. **01225/X4/outdoor**

Flight Case



for 2 pcs. X 4 and 2 pcs. MultiRigg,
partition walls, heavy duty, 9 mm
birch multiplex, PVC coated black,
6 x recessed sprung handles,
1 x butterfly catch, 4 x 100 mm blue
wheels (2 pcs. with brake), interior
lined with felt
Size (H x W x D): 63 x 61,5 x 59 cm
Order No. **16560**



Flight Case

Rain Cover